



Quality Products. Service Excellence.

General Replacement Tube Output (8 Watt) Push-Pull 125J Series


Audio

Features



- Designed for general purpose or replacement use in push-pull tube output circuits.
- Frequency response: 150 Hz. - 15 KHz (+/- 1db max. ref. 1 KHz)
- Open style with minimum 10" long primary & secondary leads.
- Also see our **125H Series**.
- For single ended use, see our **125SE Series**.
- For more impedance options, see our universal impedance push-pull **125 Series**

| Part No. | Audio Watts | Primary | Secondary | Primary Inductance | Weight (lbs.) | Overall Dimensions | | | | Mounting |
|----------|-------------|------------------|------------------|--------------------|---------------|--------------------|------|------|------|----------|
| | | Impedance (Ohms) | Impedance (Ohms) | | | A | B | C | D | Hole G |
| 125J | 8 | 2.5K or 4K | 6/8 or 3.2/4 | 5.60 H | 1 | 3.25 | 1.50 | 1.94 | 2.81 | 0.19 |

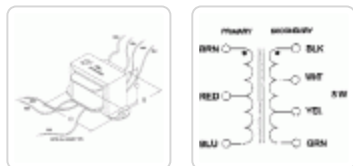

Hook Up Data

| PRIMARY IMPEDANCE Plate to Plate Brown to Blue (Ohms) | SECONDARY IMPEDANCE (Ohms) | USE SECONDARY LEAD CONNECTIONS |
|--|-----------------------------------|--------------------------------|
| 4,000 C.T. | 41857 | WHT - GRN |
| 4,000 C.T. | 3.2 / 4 | WHT - YEL |
| 2,500 C.T. | 41857 | BLK - GRN |
| 2,500 C.T. | 3.2 / 4 | BLK - YEL |

Data subject to change without notice

© 2018. Hammond Manufacturing Ltd. All rights reserved.