



DIMENSIONS:	
A	3.750" ± 0.063
B	3.936" ± 0.125
C	4.530" ± 0.063
D	3.000" ± 0.063
E	2.813" ± 0.063
F	3.594" ± 0.063
G	0.203" x 0.375" ± 0.015

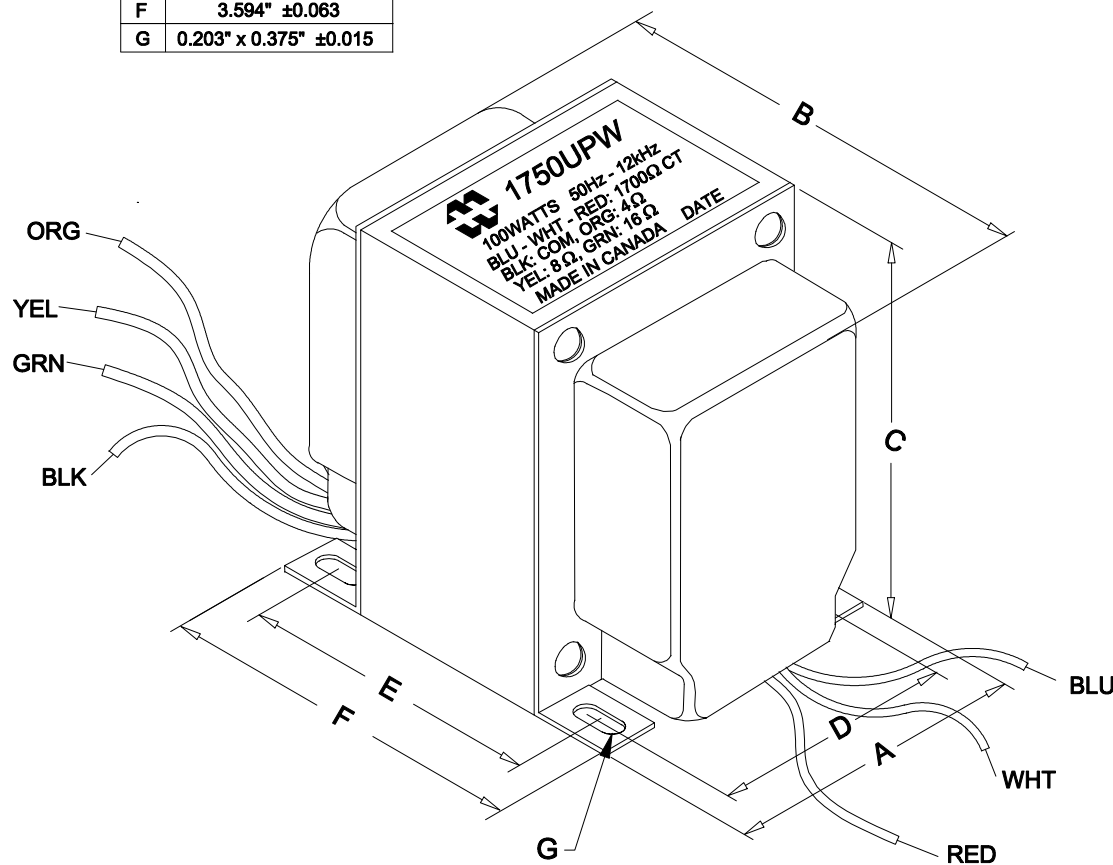

NOTE: ALL LEADS 9" OUT MIN., STRIPPED .5"

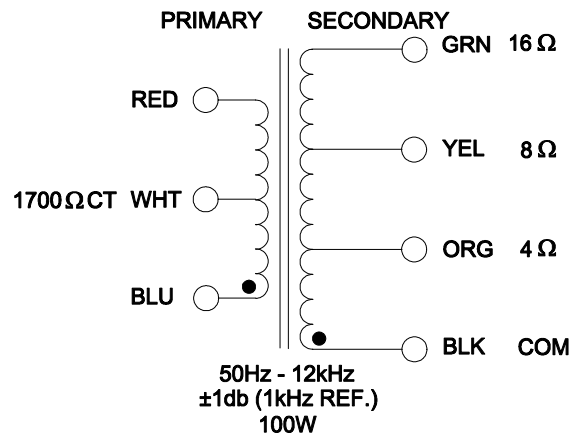

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 240V, 50Hz, BLU - RED	10mA Max.
Sec. N.L.V	@ 240V, 50Hz, BLU - RED	
	BLU - WHT = WHT - RED =	120.0V $\pm 2\%$
	BLK - ORG =	11.73V $\pm 2\%$
	BLK - YEL =	16.92V $\pm 2\%$
	BLK - GRN =	23.08V $\pm 2\%$
POLARITY	BLU, BLK	ADDITIVE
DCR	@ 20°C, BLU - WHT =	15.36 Ω $\pm 20\%$
	@ 20°C, WHT - RED =	16.56 Ω $\pm 20\%$
	@ 20°C, BLK - ORG =	0.105 Ω $\pm 20\%$
	@ 20°C, BLK - YEL =	0.200 Ω $\pm 20\%$
	@ 20°C, BLK - GRN =	0.320 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	PRELIMINARY.	C.I. 02/05/21	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: OUTPUT TRANSFORMER	DWG. NO. 1750UPW
			DATE: 02/05/21	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		