
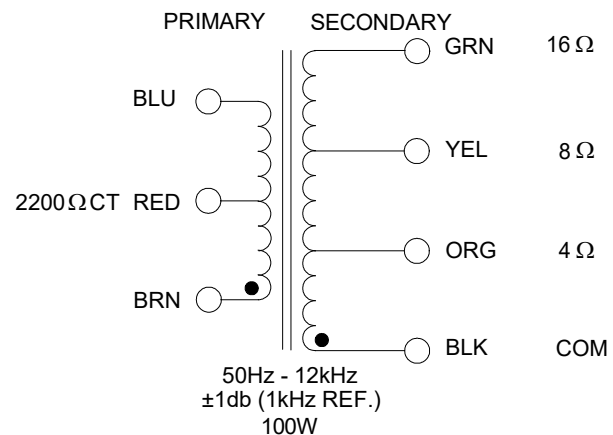


DIMENSIONS:

A	3.750" ±0.063
B	5.041" ±0.125
C	4.530" ±0.063
D	3.000" ±0.063
E	3.500" ±0.063
F	4.625" ±0.063
G	0.281" x 0.563" ±0.015

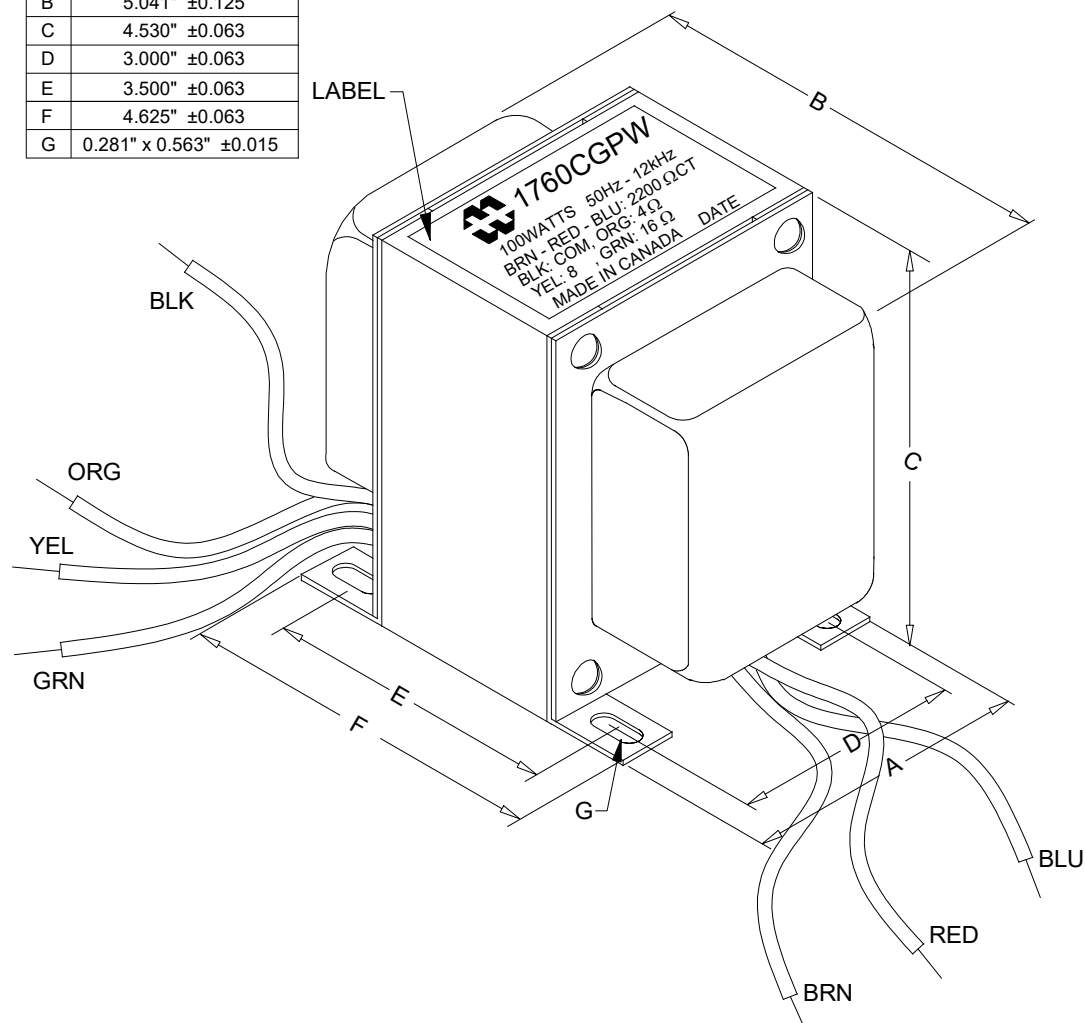

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 240V, 50Hz, BRN - BLU	13.2mA Max.
Sec. N.L.V	@ 240V, 50Hz, BRN - BLU	
	BRN - RED = RED - BLU =	120.0V ±2%
	BLK - ORG =	10.32V ±2%
	BLK - YEL =	14.64V ±2%
	BLK - GRN =	20.64V ±2%
POLARITY	BLU, BLK	ADDITIVE
DCR	@ 20°C, BRN - RED =	26.19 Ω ±20%
	@ 20°C, RED - BLU =	29.28 Ω ±20%
	@ 20°C, BLK - ORG =	0.102 Ω ±20%
	@ 20°C, BLK - YEL =	0.134 Ω ±20%
	@ 20°C, BLK - GRN =	0.183 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

NOTE: ALL LEADS 12" OUT MIN., STRIPPED .5"

REV.#	REVISION	DATE	HAMMOND MANUFACTURING ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
0	PRELIMINARY.	C.I.	02/09/21			
1	RELEASED.	C.I.	01/27/26			
				DWG. BY: C. ILIE	CHK'D BY:	TITLE: OUTPUT TRANSFORMER
				DATE: 02/09/21	APP'D. BY:	DWG. NO. 1760CGPW
					DIMENSIONS: IN(X) MM()	

PH # (519) 886-6181
FAX # (519) 886-9540