
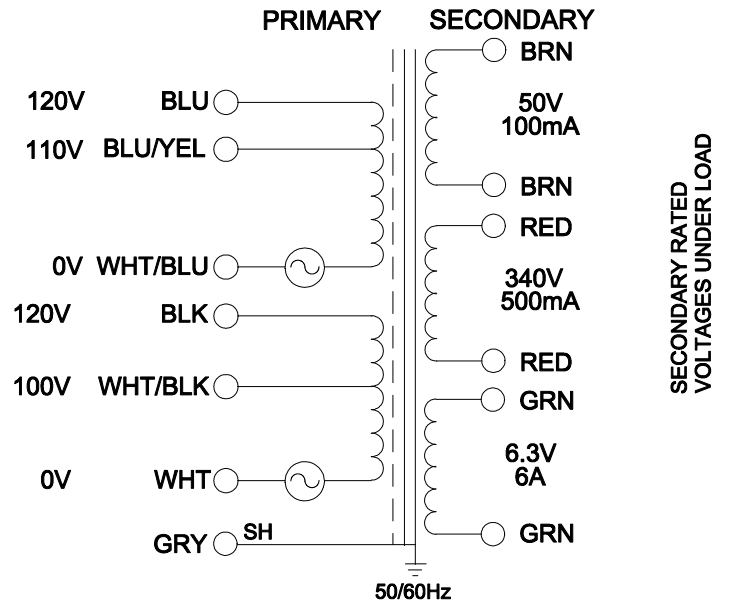


DIMENSIONS:	
A	3.750" ±0.063
B	4.186" ±0.125
C	4.500" ±0.063
D	2.030" ±0.063
E	3.000" ±0.063
F	3.750" ±0.063
G	0.750" ±0.125

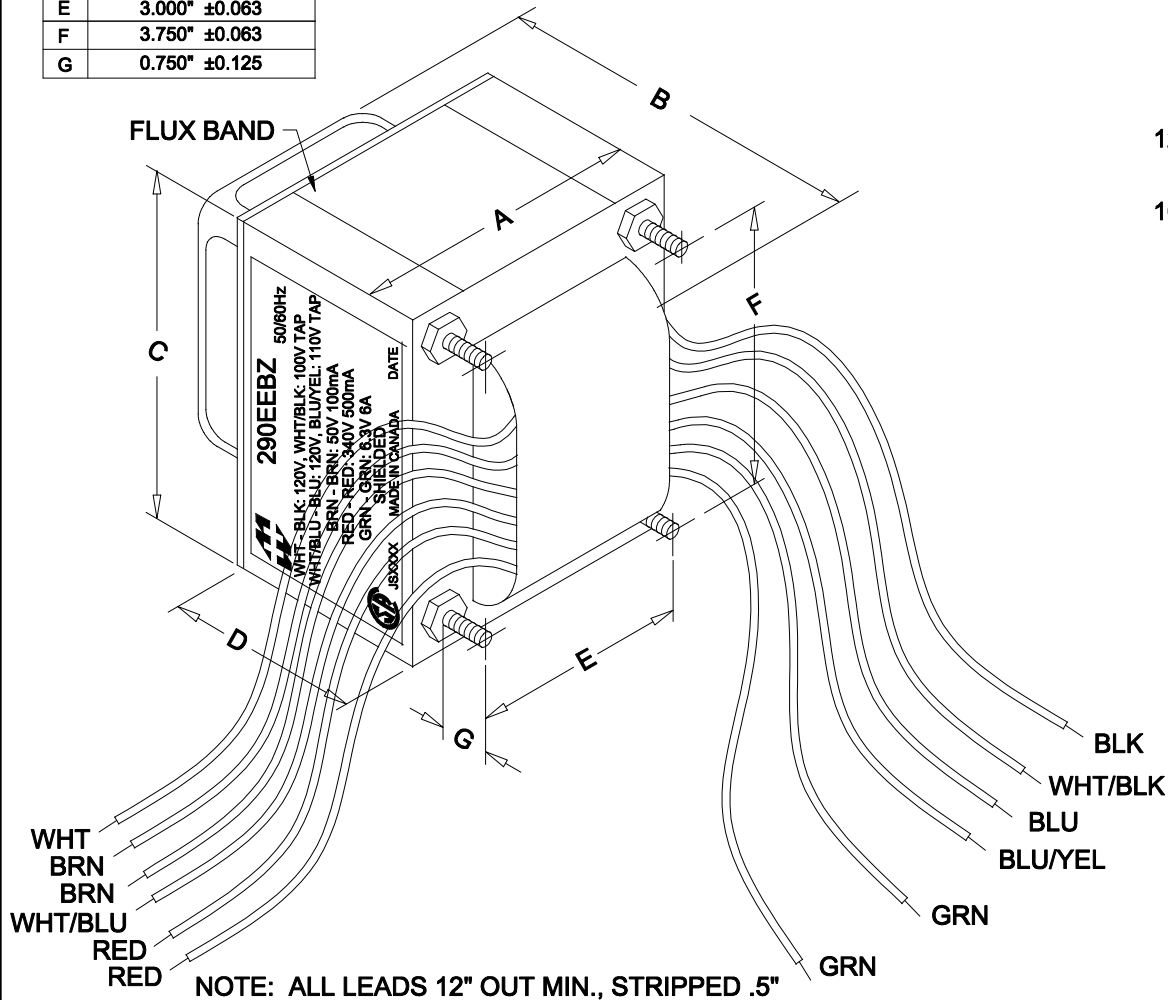

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I <sub>ex</sub>	@ 120V, 60Hz, WHT - BLK	385.2mA Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK	
	WHT - WHT/BLK =	100.1V ±2%
	WHT/BLU - BLU/YEL =	110.4V ±2%
	WHT/BLU - BLU =	120.0V ±2%
	BRN - BRN =	51.86V ±2%
	RED - RED =	352.2V ±2%
	GRN - GRN =	6.633V ±2%
DCR	@ 20°C, WHT - BLK =	1.673 Ω ±20%
	@ 20°C, WHT/BLU - BLU =	1.793 Ω ±20%
	@ 20°C, BRN - BRN =	8.284 Ω ±20%
	@ 20°C, RED - RED =	11.80 Ω ±20%
	@ 20°C, GRN - GRN =	0.019 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED.	C.I. 06/05/19
1	REVISED LEAD EXITS.	C.I. 08/16/19

**HAMMOND ELECTRONIC DIVISION**  
**MANUFACTURING**™  
 52 RANKIN PLACE,  
 WATERLOO, ONTARIO, N2J 3Z5  
 PH # (519) 886-6181  
 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 290EEBZ
DATE: 06/05/19	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		