
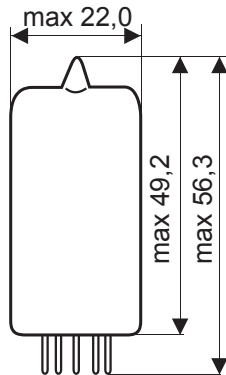


E83CC

A. F. DOUBLE TRIODE

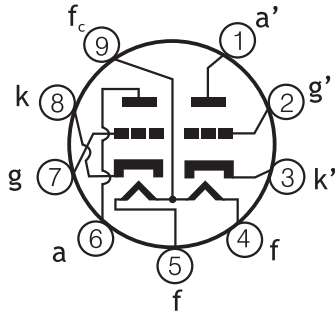

Base: NOVAL

$U_f = 6,3 / 12,6 \text{ V}$
 $I_f = 300 / 150 \text{ mA}$

Typical Characteristics:


$U_a = 250 \text{ V}$
 $U_g = -2 \text{ V}$
 $I_a = 1,25 \text{ mA}$
 $S = 1,6 \text{ mA/V}$
 $R_i = 62,5 \text{ k}\Omega$
 $\mu = 100$

Limiting Values:

$U_a = 300 \text{ V}$
 $W_a = 1 \text{ W}$
 $I_k = 9 \text{ mA}$
 $U_g = -55 \text{ V}$
 $R_g = 2,2 \text{ M}\Omega$
 $U_{k/f} = 180 \text{ V}$
 $R_{k/f} = 150 \text{ k}\Omega$

Capacitances:

	system I.	system II.	
$C_{g/k} =$	1,6	1,6	pF
$C_a =$	0,46	0,46	pF
$C_{g/a} =$	1,7	1,7	pF

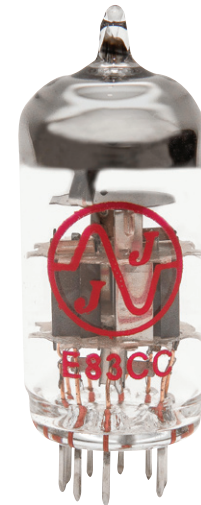

TRANSFER CHARACTERISTICS

PLATE CHARACTERISTICS

