




- | | |
|-----------------|----------------|
| 1. V_{OUT} | 5. GND (Power) |
| 2. V_{OUT} | 6. N.C. |
| 3. GND (Signal) | 7. V_{CC} |
| 4. V_{IN} | |

	Type	Time(T_{60})
S	short	2.0s
M	medium	2.5s
L	long	2.85s

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Voltage	V_{CC}	4.5	5.0	5.5	V
Supply Current	I_{CC}		60	100	mA
Input Voltage	V_{IN}			1.5	V_{PEAK}
Voltage Gain			0		dB(>10k Ω load)
Residual Noise				-72	dBV
Input Impedance	Z_{IN}		10k		Ω
Output Impedance	Z_{OUT}		220		Ω
Operating Temperature		-40		+85	C

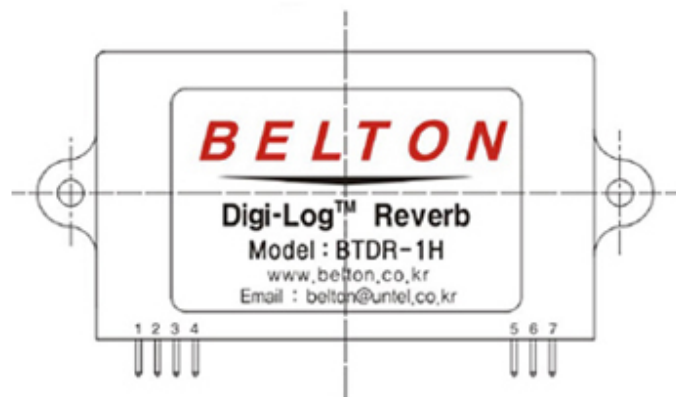