



DIMENSIONS:

A	2.875" ±0.063
B	1.900" ±0.125
C	2.370" ±0.063
D	2.375" ±0.063
G	0.187" ±0.015

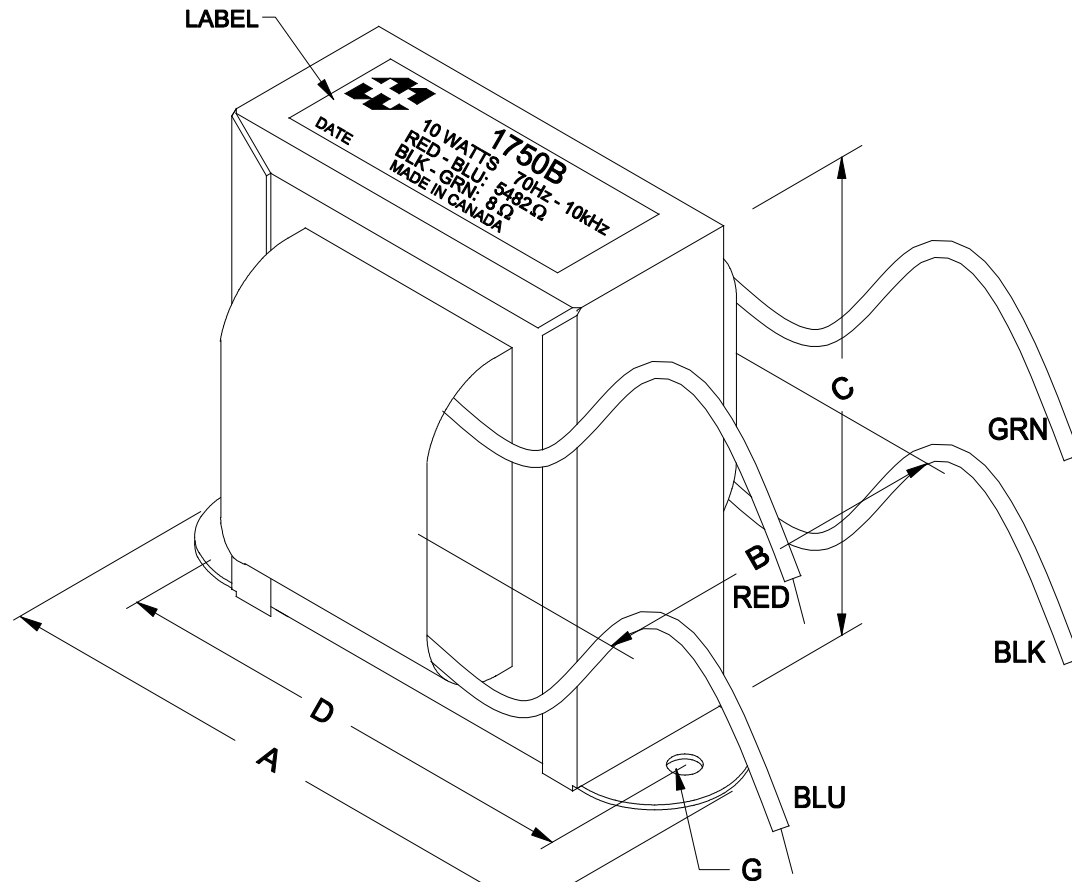

NOTE: ALL LEADS 9" LONG MIN.

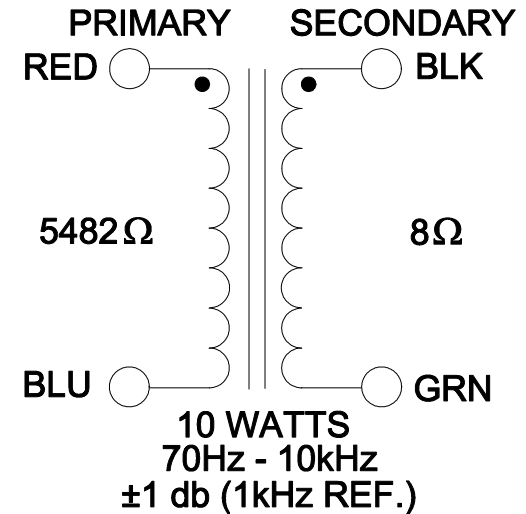

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 234V, 400Hz, RED - BLU	17.88mA	Max.
Sec. N.L.V	@ 234V, 400Hz, RED - BLU		
	BLK - GRN =	8.882V	±2%
DCR	@ 20°C, RED - BLU =	254.6 Ω	±20%
	@ 20°C, BLK - GRN =	0.420 Ω	±20%
HIPOT	PRIMARY - SECONDARY	1750V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	 HAMMOND MANUFACTURING™		ELECTRONIC DIVISION	
0	RELEASED.	09/21/10	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181 FAX # (519) 886-9540	
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: 1750B TRANSFORMER	DWG. NO. 1750B
			DATE: 09/21/10	APP'D. BY:		
			DIMENSIONS: IN() MM()			